



CURRENT MACHINERY OFFERS

>> Sale of used, new and demo metering machines directly from Hennecke Inc. (catalogue as of 05/2020)

ECOPLUS 100 / HIGH-PRESSURE METERING MACHINE




Manufacturer (country of origin)	HENNECKE-OMS (Italy)
Number of components	2
Mixhead type	Y2K 12/18
Mixhead injector type	Standard injectors
Max. total output (pumps)	33–85 l/m (each pump fixed @ 33 cc/rev)
Max. total output (mixhead)	200–1100 g/s
Max. processing temperature	105°F
Work tank capacity	100 l each
Main applications	Manufacturing of rigid and flexible PU foam
Operating time	0 hours (new)
Voltage	480 VAC
Pressure vessel directive(s)	ASME
Equipment (extracts)	Mixhead pendant, boom

Available from

May 2020

Offer number: 5201

TOPLINE HK / HIGH-PRESSURE METERING MACHINE

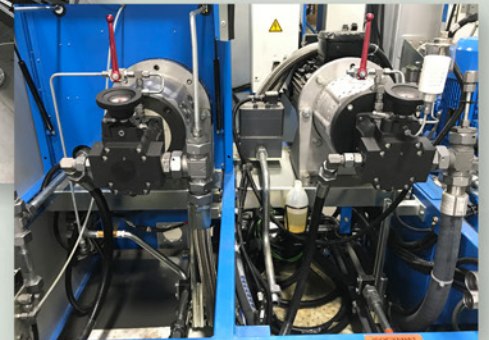

Manufacturer (country of origin)	Hennecke GmbH (Germany)
Number of components	2
Mixhead type	MT 18-2
Mixhead injector type	Constant pressure injectors
Max. total output (pumps)	1300 cm ³ /s of mixture @ 50Hz, 1560 cm ³ /s of mixture @ 60Hz
Max. total output (mixhead)	600 cm ³ /s laminar (open pour)
Max. processing temperature	50°C
Work tank capacity	250 l each
Main applications	Cold-curing flexible foam, rigid and semi-rigid integral foam, compact systems and filling foam
Operating time	0 hours (new)
Voltage (connected load)	480 VAC
Pressure vessel directive(s)	ACME
Equipment (extracts)	HMI Pedestal, Pentane ready, Allen-Bradley controls

Available from

May 2020

Offer number: 5202

HT 180 / HIGH-PRESSURE PISTON METERING MACHINE



Manufacturer (country of origin)	Hennecke GmbH (Germany)
Number of components	2
Mixhead type	MT 12
Mixhead injector type	Standard injectors
Max. total output (pumps)	180 cm ³ /s 2 x 80mm plunger A-side [Polyol]; 250bar HP11 max. Output 250 (300) cm ³ /s @ 60Hz B-side [Isocyanate]
Max. total output (mixhead)	50-300cm ³ /s (open pour); 600cm ³ /s (closed pour)
Max. processing temperature	120°F
Work tank capacity	250 l each (4 bar)
Main applications	Filled PU systems
Operating time	8192 hours (used)
Voltage (connected load)	480 VAC
Pressure vessel directive(s)	ACME
Equipment (extracts)	N/A

Available from

January 2021

Offer number: 5203

IMPACT 6 / LOW-PRESSURE METERING MACHINE



Manufacturer (country of origin)	HENNECKE-OMS (Italy)
Number of components	2
Mixhead type	ULTIMIX C12
Mixhead injector type	Variable (tool box provided)
Max. total output (pumps)	1–6 l/m (both pumps)
Max. total output (mixhead)	12 l/m
Max. processing temperature	105°F
Work tank capacity	100 l each
Main applications	Manufacture of rigid (low output rate) and flexible PU foam
Operating time	0 hours (new)
Voltage (connected load)	480 VAC
Pressure vessel directive(s)	N/A
Equipment (extracts)	Mixhead pendant, boom

Available from

May 2020

Offer number: 5204

IMPACT 6 / LOW-PRESSURE METERING MACHINE




Manufacturer (country of origin)	HENNECKE-OMS (Italy)
Number of components	2
Mixhead type	ULTIMIX C12
Mixhead injector type	Variable
Max. total output (pumps)	1,5–6 l/m (both pumps)
Max. total output (mixhead)	12 l/m
Max. processing temperature	105°F
Work tank capacity	100 l each
Main applications	Manufacture of rigid (low output rate) and flexible PU foam
Operating time	approx. 500 hours (used)
Voltage (connected load)	480 VAC
Pressure vessel directive(s)	.4 bar dry air circuit, non-rated (poly side)
Equipment (extracts)	Mixhead pendant, boom, tank agitator (poly side)

Available from

May 2020

Offer number: 5205



IBC STATION



Manufacturer (country of origin)	Hennecke GmbH (Germany)
IBC tote capacity	2
Operating time	0 hours (new)
Voltage	480 VAC

Available from


May 2020

Offer number: 5206

CONTACT US ANYTIME FOR A QUOTE!

If you are interested in any of the machine systems listed, you can contact our sales experts for a formal quotation. Please remember to include the respective offer number (bottom right-hand corner of the descriptions).

Please send your inquiry to: dosing@us.hennecke.com

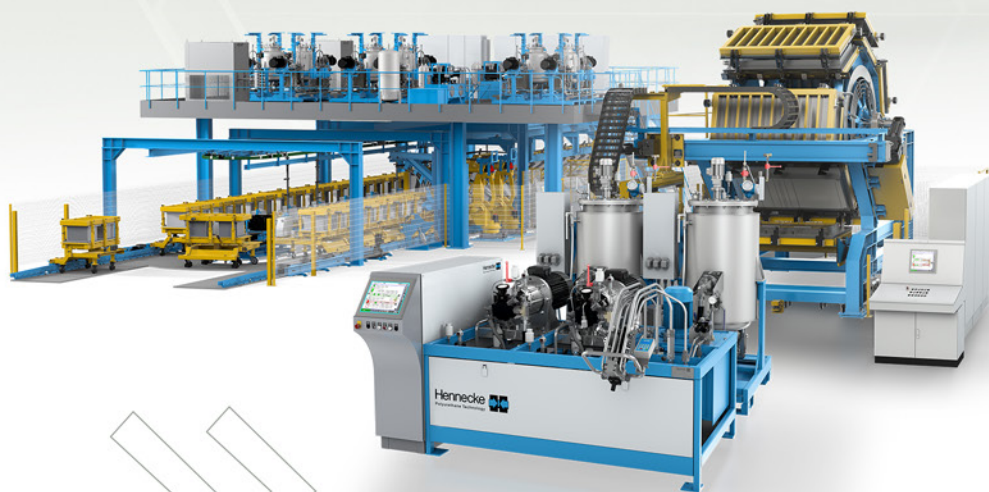

 **FASCINATION PUR**