



CURRENT MACHINERY OFFERS

- Sale of used, new and demo metering machines directly from the Hennecke headquarters (catalogue as of 03/2024)

ECOPLUS MK2 770/770 HIGH-PRESS. METERING MACHINE



| | |
|----------------------------------|---|
| Manufacturer (country of origin) | Hennecke Polyurethane Technology (Germany) |
| Number of components | 2 |
| Mixhead type | MT-E 22 |
| Mixhead injector type | FIXJET |
| Max. total output (pumps) | 1540 cm ³ /s@60 Hz (A:B = 100:100) |
| Max. total output (mixhead) | 2000 cm ³ /s |
| Max. processing temperature | 40 °C |
| Work tank capacity | 100 l |
| Main applications | Production of rigid foam insulation and supporting material |
| Year of manufacture | 2022 |
| Operating time | no raw material using only mesamoll |
| Voltage (connected load) | 400V@50 Hz |
| Pressure vessel directive(s) | AD 2000 |
| Equipment (extracts) | N/A |

Available from

12/2023

Offer number: 4301

TOPLINE 130/65 HIGH PRESSURE METERING MACHINE



Symbolic image


| | |
|----------------------------------|---|
| Manufacturer (country of origin) | Hennecke Polyurethane Technology (Germany) |
| Number of components | 2 |
| Mixhead type | MT-A 8 |
| Mixhead injector type | FLEXJET |
| Max. total output (pumps) | 195 cm ³ /s |
| Max. total output (mixhead) | 300 cm ³ /s |
| Max. processing temperature | 50 °C |
| Work tank capacity | 60 l |
| Main applications | Production of semi-rigid foam and flexible foam |
| Year of manufacture | 2022 |
| Operating time | none |
| Voltage (connected load) | 400V@50 Hz |
| Pressure vessel directive(s) | AD 2000 |
| Equipment (extracts) | N/A |

IMPACT LOW-PRESSURE METERING MACHINE



| | |
|----------------------------------|---|
| Manufacturer (country of origin) | Hennecke Polyurethane Technology (Germany) |
| Number of components | 2 |
| Mixhead type | ULTIMIX C12 (automatic cleaning agent flush) |
| Mixhead injector type | Standard injectors |
| Max. total output (pumps) | 11 l/min@50 Hz (A:B = 1:1) |
| Max. total output (mixhead) | 30,7 cm ³ /s |
| Max. processing temperature | 35 °C |
| Work tank capacity | 100l |
| Main applications | Manufacture of rigid PU foam |
| Year of manufacture | 2020 |
| Operating time | No operating hours (brand-new) |
| Voltage (connected load) | 400V@50 Hz |
| Pressure vessel directive(s) | EU |
| Equipment (extracts) | Agitator on polyol side, tank level control, filter on component feeding line, plate heat exchanger, programmable temperature control, SIMATIC PLC with touchscreen and data export functionality |

JETLINE LOW-PRESSURE METERING MACHINE

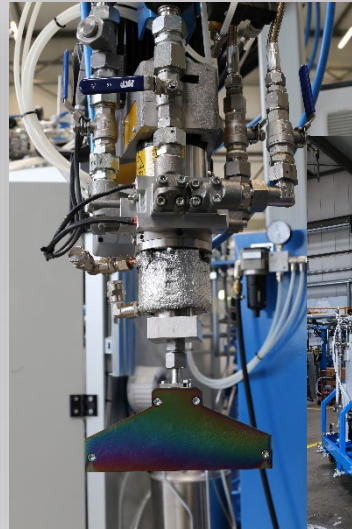

| | |
|----------------------------------|--|
| Manufacturer (country of origin) | Hennecke-OMS (Italy) |
| Number of components | 2 |
| Mixhead type | ULTIMIX WCM |
| Mixhead injector type | Standard injectors |
| Max. total output (pumps) | 200 cm ³ /s@50 Hz (A:B = 1:1) |
| Max. total output (mixhead) | 200 cm ³ /s |
| Max. processing temperature | 70 °C |
| Work tank capacity | 50 l & 181 |
| Main applications | Wet Compression Moulding (WCM) to produce lightweight fiber-reinforced-plastic structures (GFRP, Carbon) |
| Year of manufacture | 2019 |
| Operating time | approx. 2 weeks (04/2020) |
| Voltage (connected load) | 400V@50 Hz |
| Pressure vessel directive(s) | EU |
| Equipment (extracts) | Release agent station, jet nozzle for WCM applications |

Available from

10/2020

Offer number: 4209

STREAMLINE HIGH PRESSURE METERING MACHINE



| | |
|----------------------------------|--|
| Manufacturer (country of origin) | Hennecke Polyurethane Technology (Germany) |
| Number of components | 2 |
| Mixhead type | MT6 |
| Mixhead injector type | Constant pressure injectors |
| Max. total output (pumps) | 80 cm ³ /s@50 Hz (A:B = 1:1) |
| Max. total output (mixhead) | 50 cm ³ /s |
| Max. processing temperature | 50 - 100 °C (adjustable) |
| Work tank capacity | 30 l |
| Main applications | Production of transparent and resistant polyurethane coatings for decor applications |
| Year of manufacture | 2017 |
| Operating time | approx. 4.500 shots (04/2020) |
| Voltage (connected load) | 400V@50 Hz |
| Pressure vessel directive(s) | EU |
| Equipment (extracts) | Axial piston pump and plunger pump to process additives, fillers and colors |

Available from

04/2020

Offer number: 4208

CONTACT US ANYTIME FOR A QUOTE!

If you are interested in any of the machine systems listed, you can contact our sales experts for a formal quotation. Please remember to include the respective offer number (bottom right-hand corner of the descriptions).

Please send your inquiry to: dosing@hennecke.com