



CURRENT MACHINERY OFFERS

>> Sale of used, new and demo metering machines directly from Hennecke Inc. (catalogue as of 04/2022)

ECOPLUS 100 / HIGH-PRESSURE METERING MACHINE



Manufacturer (country of origin)	HENNECKE-OMS (Italy)
Number of components	2
Mixhead type	Y2K 12/18
Mixhead injector type	Standard injectors
Max. total output (pumps)	33–85 l/m (each pump fixed @ 33 cc/rev)
Max. total output (mixhead)	200–1100 g/s
Max. processing temperature	105°F
Work tank capacity	100 l each
Main applications	Manufacturing of rigid and flexible PU foam
Operating time	0 hours (new)
Voltage	480 VAC
Pressure vessel directive(s)	ASME
Equipment (extracts)	Mixhead pendant, boom

Available from

May 2020

Offer number: 5201

ECOPLUS 35R / HIGH-PRESSURE METERING MACHINE



symbolic picture

Manufacturer (country of origin)	Hennecke GmbH (Germany)
Number of components	2
Mixhead type	MT-E 12-2
Mixhead injector type	Constant pressure injectors
Max. total output (pumps)	17.6 l/min
Max. total output (mixhead)	50-300 cm ³ /s
Max. processing temperature	122°F
Work tank capacity	100 l each
Operating time	0 hours (new)
Voltage	480 VAC
Full Load Amps	57 A
Pressure vessel directive(s)	ASME
Equipment (extracts)	Mixhead pendant, Boom, Agitator, Magnetic coupling, Auto. filling via pneumatic shutoff, Closed loop control

Available from

June 2022

Offer number: 5209

ECOPLUS 100R / HIGH-PRESSURE METERING MACHINE



symbolic picture

Manufacturer (country of origin)	Hennecke GmbH (Germany)
Number of components	2
Mixhead type	MT-E 18-2
Mixhead injector type	Constant pressure injectors
Max. total output (pumps)	52.8 l/min
Max. total output (mixhead)	125-600 cm ³ /s
Max. processing temperature	122°F
Work tank capacity	100 l each
Operating time	0 hours (new)
Voltage	480 VAC
Full Load Amps	84 A
Pressure vessel directive(s)	ASME
Equipment (extracts)	Mixhead pendant, Boom, Agitator, Magnetic coupling, Auto. filling via pneumatic shutoff, Closed loop control

Available from

June 2022

Offer number: 5208

IMPACT 6 / LOW-PRESSURE METERING MACHINE



Manufacturer (country of origin)	HENNECKE-OMS (Italy)
Number of components	2
Mixhead type	ULTIMIX C12
Mixhead injector type	Variable (tool box provided)
Max. total output (pumps)	1–6 l/m (both pumps)
Max. total output (mixhead)	12 l/m
Max. processing temperature	105°F
Work tank capacity	100 l each
Main applications	Manufacture of rigid (low output rate) and flexible PU foam
Operating time	0 hours (new)
Voltage (connected load)	480 VAC
Pressure vessel directive(s)	N/A
Equipment (extracts)	Mixhead pendant, boom

Available from

May 2020

Offer number: 5204

TOPLINE HK / HIGH-PRESSURE METERING MACHINE




Manufacturer (country of origin)	Hennecke GmbH (Germany)
Number of components	2
Mixhead type	MT 12-2
Mixhead injector type	Constant pressure injectors
Max. total output (pumps)	324 cm ³ /s
Max. total output (mixhead)	50-300 cm ³ /s
Max. processing temperature	50°C (122°F)
Work tank capacity	250 l each
Operating time	0 hours (new)
Voltage (connected load)	480 VAC
Full Load Amps	60 A
Pressure vessel directive(s)	ASME
Equipment (extracts)	Mixed pendant, Agitator, Magnetic coupling (isocyanate only), Auto. filling diaphragm pump, Closed loop control

Available from

July 2022

Offer number: 5207



IBC STATION



Manufacturer (country of origin)	Hennecke GmbH (Germany)
IBC tote capacity	2
Operating time	0 hours (new)
Voltage	480 VAC

Available from


May 2022

Offer number: 5206

CONTACT US ANYTIME FOR A QUOTE!

If you are interested in any of the machine systems listed, you can contact our sales experts for a formal quotation. Please remember to include the respective offer number (bottom right-hand corner of the descriptions).

Please send your inquiry to: dosing@us.hennecke.com

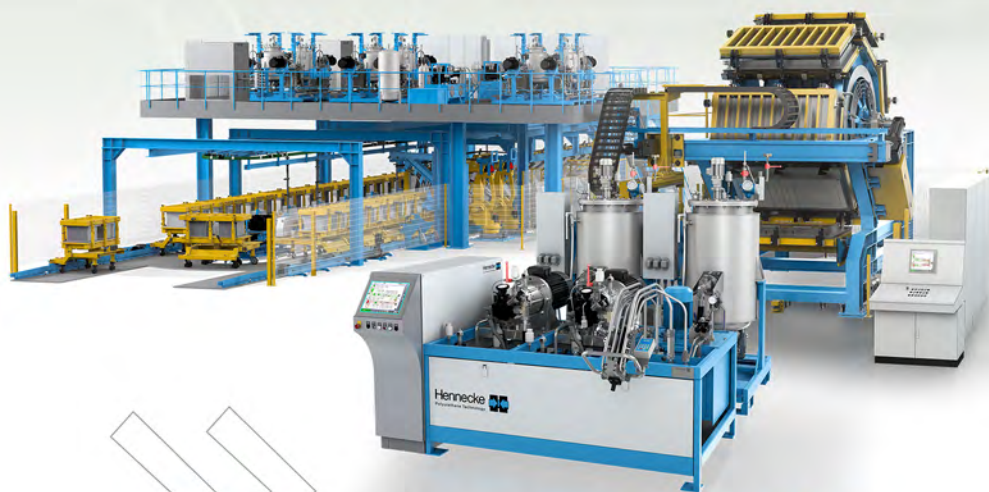

 **FASCINATION PUR**